



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 10 DEC 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03447253.0

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03447253.0
Demande no:

Anmeldetag:
Date of filing: 15.10.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Metris N.V.
Interleuvenlaan 15D
3001 Leuven
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

A method, device and computer program for evaluating an object using a virtual representation of said object

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06F17/40

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

A METHOD, DEVICE AND COMPUTER PROGRAM FOR EVALUATING AN OBJECT USING A VIRTUAL REPRESENTATION OF SAID OBJECT

FIELD OF THE INVENTION

- 5 The present invention is relates to a, method, device and computer program for evaluating a physical object.

BACKGROUND OF THE INVENTION

10 For the industrial dimensional control of produced parts or prototypes, different types of measurement equipment is used. Some equipment, such as microscopes or profile projectors, takes measures of the part without physically touching it, using a non-contacting technique. Other equipment, such as dial gauges or Coordinate Measuring Machines (CMMs), actually touch the part while taking the measurements.

- 15 All this equipment can also be divided in another way: manual, motorized or Computer Numerical Controlled (CNC):

1. Manual equipment requires the user to manually make the measurement by physically handling the equipment and the part during the measurement.
- 20 2. Motorized equipment uses motors controlled by the user to displace certain parts of the equipment in order to make the measurement on the part in consideration.
- 25 3. In CNC equipment there are also motors that drive parts of the equipment for performing the measurement, but instead of a single displacement controlled by the user, a sequence of displacements can be carried out by the equipment for performing multiple measurements. This sequence is performed under the direction of a measurement program or macro. A macro consists generally of displacement commands, point measurement commands and feature (plane, slot, hole, ...) calculation and evaluation (*i.e.* comparison with the nominal value) commands. The macro is built by the user beforehand and can be repeated an indefinite number of times on the same part or on a (quite) similar part. During the execution of the macro
30 the measurement equipment runs autonomously, but the part being measured remains physically present in the measurement equipment.

Certain measurement equipment can be a combination of manual, motorized and/or CNC.

Three-dimensional control in industry is mostly carried out by CMMs, because of their flexibility and accuracy. All CNC-CMMS have the capability of building and executing macros, and are widely used and standardized in industry. The industry standard language for these macros is DMIS (Dimensional Measuring Interface Standard). Macros for most industrial parts have been written in the last 20 years. Macros specific for parts would also be available within the company manufacturing these parts.

Unfortunately, the measurement equipment is expensive, slow, but a vital part of the ISO 9002 systems of their users.

The macros can be created in two different ways:

1. Teach-in method: The user controls the movements and actions (e.g. taking measurements) of the measurement equipment. Each movement and action is recorded on to a storage medium, ultimately as a macro so the measurement equipment can re-perform these any number of times by reading the macro. In addition to recording movements and actions, the macro may be programmed to perform mathematical computations on the results of the measurements such as 'compute a circle through the 3 measured points' or 'compare the diameter of the computed circle with a certain value'. Thus, a sequence of displacements, measurements, computations and comparisons constitute the macro.
2. Off-line method: Using the part drawings of the object or feature on paper, or using the Computer Aided Design (CAD) model of the part, the user can manually build a macro by writing down the sequence of macro commands. The displacements, measurements, computations and comparisons, the equipment has to carry out derived therefrom constitute the macro.

Although macros can be written as described above, it is an advantage for a manufacturer to also be able to use a macro from the library of prewritten macros, since creating a macro can be time consuming and technically demanding.

1. Measurement equipment availability: The high expense of precision engineering measurement equipment means often a parts manufacturer will have a minimum number of measurement equipment devices, which are kept in constant operation often to a strict schedule. If, once in receipt of evaluation of the macro measurement results, other measurements are deemed necessary, space has to be found in the machine-time schedule to re-measure the part. This might require a substantial delay and disruption to the schedule which has financial repercussions.
2. Communication in a world wide production environment: The manufacturer of a physical object might be located in a part of the world that is far from the client who specified the dimensions of the part. If there is a quality control issue with the part, the part has to be shipped back to the manufacturer for further analysis where the measurement equipment for evaluation is usually sited. The shipping and re-measuring causes substantial delays to the client, and the delays might have cost implications.

15

It is an aim of the invention to provide a method and device that enables a physical object to be evaluated wherein neither the physical object, nor measurement equipment capable of evaluating a physical object are required to be present during evaluation. It is a further aim to that the method and device take advantage of the substantial archive of macros that is available now and in the future to automate the evaluation of the object.

20

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 - a schematic representation of a method of the invention wherein a macro and a numerical representation of the object (virtual object) are inputted into a method of the invention, and evaluation data is the result of applying the method.

25

Figure 2 - a schematic representation of a method of the invention, wherein the method is held on an intermediary computer, and a numerical representation of the object is forwarded thereto from a remote computer. The evaluation is forwarded to another remote computer. This embodiment of the invention allows a part manufactured in a remote location to be scanned by the manufacturer and evaluated by the client at another remote location.

30

Figure 3 - a schematic representation of a method of the invention, wherein the method is held on a client's computer, and a numerical representation of the object is forwarded thereto from a computer of the manufacturer.

SUMMARY OF THE INVENTION

An embodiment of the present invention is a method for evaluating a physical object comprising the steps of:

- reading the instructions of a macro,
- 5 - said macro suitable for use with measurement equipment capable of performing measurements of a physical object,
- said macro comprising instructions for said equipment to perform an evaluation of a physical object,
- performing the instructions of said macro upon a numerical representation of
- 10 the surface of said object, and
- obtaining from the results of the macro, an evaluation of the physical object.

Another embodiment of the present invention is a method as described above wherein said numerical representation of the surface is obtained by scanning part or all of the

15 physical object using an object scanner.

Another embodiment of the present invention is a method as described above wherein said numerical representation of the surface is any of point cloud data, triangulated mesh data, rendered surface data, or polyline data.

20

Another embodiment of the present invention relates to a method as described above wherein said measurement equipment is a Coordinate Measuring Machine, CMM.

Another embodiment of the present invention relates to a method as described above wherein said macro comprises Dimensional Measuring Interface Standard, DMIS, commands.

25

Another embodiment of the present invention relates to a method as described above wherein said macro comprises CMM commands.

30

Another embodiment of the present invention relates to a method as described above wherein said measurement equipment is a Coordinate Measuring Machine, CMM.

Another embodiment of the present invention relates to a method as described above wherein hereby the said evaluation is communicated in the format of CMM measurement results.

5 Another embodiment of the present invention relates to a method as described above wherein the instructions of said macro that are performed relate to the measurement of data from the numerical representation of the surface.

Another embodiment of the present invention relates to a method as described above wherein translations through the surface of the object may be performed by the method.

10 Another embodiment of the present invention relates to a method as described above wherein a measurement comprises the steps of:

- 15 (a) determining those elements of data numerically representing the object, that correspond to the position on the physical object to be measured, without increasing the resolution by calculating the co-ordinates of any additional points,
- (b) calculating by interpolation of the elements determined in step (a) additional points in the area of the position to be measured, so increasing the resolution therein,
- 20 (c) calculating from the higher-resolution area determined in step (b) a measurement of the object.

Another embodiment of the present invention relates to a method as described above wherein one or more instructions of said macro have been created by using said numerical representation of the physical object.

25 Another embodiment of the present invention relates to a method as described above wherein said instructions are recorded to the macro by way of a DMIS-measurement program or using the DMIS commands format.

30 Another embodiment of the present invention relates to a method as described above wherein said instructions are part of a measurement sequence generated by recording commands of a Coordinate Measuring Machine measurement program.

Another embodiment of the present invention relates to a method as described above in which the said instructions are part of a measurement sequence in a Coordinate Measuring Machine measurement program.

5 Another embodiment of the present invention relates to a method as described above wherein said evaluation comprises the execution of steps on a computer in an automatic way without interaction with the user of said computer during the execution of the said steps:

10 Another embodiment of the invention relates to a method for virtually measuring an object using a cloud of points virtually representing the said object and calculating the value or values that approximates the value or values that would result from the measurement of the said object by a measuring device.

15 Another embodiment of the invention relates to a method for virtually probing an object using a cloud of points virtually representing the said object and calculating or selecting the point that approximates the point that would result from the probing of a CMM on the said object.

20 Another embodiment of the invention relates to a computer program stored on a computer readable medium capable of performing the method as described above.

Another embodiment of the invention relates to a computer program as described above further comprising the ability to receive a numerical representation of the physical object
25 from a remote computer.

Another embodiment of the present invention relates to a computer as described above wherein the numerical representation is received from the remote computer across any of the Internet, email, wireless link, public switched telephone network, ISDN, satellite link,
30 or by physical transport of a computer readable storage medium holding said numerical representation.

Another embodiment of the invention relates to a computer program as described above wherein said computer readable storage medium is any of optical disk, magnetic disk, optic-magnetic disk, magnetic tape.

- 5 Another embodiment of the present invention relates to a computer program as described above, further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send a numerical representation of the physical object over the Internet to said method.
- 10 Another embodiment of the present invention relates to a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send said macro over the Internet to said method.
- 15 Another embodiment of the present invention relates to a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send the title of said macro or an indication thereof over the Internet to said method.
- 20 Another embodiment of the invention further relates to a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to receive an evaluation report of a physical object generated by said method.
- 25 Another embodiment of the present invention further relates to a computer program as described above, further comprising the ability to display a pay-per-use interface on a web browser of a remote computer connected to the Internet, said pay-per-use interface capable of one or more of the following:
- 30 (a) requesting and/or providing a username and password to the remote computer user, to enable a user to access an account for using the method,
(b) requesting billing information of the remote computer user,
(c) indicating a billing amount to the remote computer user, relating to the number of evaluations performed.

Another embodiment of the present invention further relates to a device capable of performing a method as described above.

5 Another embodiment of the present invention further relates to a piece of measurement equipment capable of performing measurements of a physical object, capable of performing a method as described above.

10 Another embodiment of the present invention further relates to a piece of measurement equipment as described above wherein said equipment is a CMM.

DETAILED DESCRIPTION OF THE INVENTION

The invention relates to a method of evaluating a physical object by applying a measurement equipment macro to a numerical representation of the object.

15 One embodiment of the present invention is a method for evaluating a physical object comprising the steps of

- reading the instructions of a macro,
 - said macro suitable for use with measurement equipment capable of performing one or more measurements of a physical object,
 - said macro comprising instructions for performing an evaluation of a physical object
- performing the instructions of said macro upon a numerical representation of the surface of said object,
- 25 - obtaining from the results of the macro an evaluation of the physical object.

The instructions of the macro are performed by a method of the invention upon a numerical representation of the object. For example, the macro might normally instruct the measurement equipment to touch the physical object from a particular direction and take a co-ordinate measurement therefrom. The method performs the same measurement without the need of measurement equipment or physical object by obtaining the same co-ordinate measurement from a numerical representation of the object.

By executing the macro on the numerical representation of the physical object, the presence of the measurement equipment is not necessary and, therefore, displacements of the parts by the equipment (e.g. displacements of robot arms) are not physically carried out and are unnecessary. The evaluation of the physical object by the macro is, therefore, carried out
5 virtually. According another aspect of the invention, said method may be performed by a computer program stored on a computer readable medium. The instructions of the macro are interpreted and applied to the numerical representation of the physical object.

Evaluating a physical object means obtaining information regarding the shape of a portion, a
10 whole and/or feature (e.g. a hole, a groove, a protrusion) of a physical object. Such information provides a user with an assessment of, for example; the trueness of a circular hole, the trueness of a square groove, the dimensions of the object etc.

Measurement equipment that is capable of performing an evaluation of the object is known in
15 the art. Measurement equipment usually comprises a probe that measures the object and a means to move the probe, such as, for example, a robot arm. The measurement equipment may be programmable. Examples include, but are not limited to, measuring devices that touch the physical object such as CMMs, dial gauges and measuring devices that does not touch the physical object such as microscopes or profile projectors.

20 According to the invention, macros are any macros that instruct a piece of measurement equipment capable of measuring an object, to perform an evaluation of the object. It is another aspect of the invention that the macro would directly instruct a piece of measurement equipment. It is a further aspect of the invention that a macro contains one or more
25 commands to displace the probe of the measurement equipment. It is a further aspect of the invention that a measurement equipment macro contains one or more commands to perform calculation and comparisons on the measurements obtained.

The method of the invention supports any macro format. The macro may be of a previous,
30 current or future format. According to one aspect of the invention, the macro may be in the Dimensional Measuring Interface Standard (DMIS) format. The invention is not limited to the use of one macro; multiple macros may be used and executed consecutively or simultaneously.

According to one aspect of the invention, the numerical representation of the physical object is obtained by scanning part or all of the object using an object scanner. The scanning may be performed by any method or device, including some of the aforementioned measurement equipment - either manual, motorized or CNC - that has the capability of measuring the three-dimensional points of the surface of a physical object.

The scanning process results in a density of points that is a virtual representation of the physical part. 'Virtual' in the sense that the representation contains the contours, physical dimensions, features and details of the part. The degree of detail and accuracy at which the dimensions and contours are captured, depends on the accuracy and the resolution of the measurement equipment.

To further enhance to the virtual representation, the scanning software may optionally create triangles between adjacent points of the point cloud, resulting in a topologically representative model of the object that has increased apparent resolution. These triangles or meshes enable the user to investigate the part in between the points by interpolating on the triangles between the points. It is an embodiment that said enhancement of the virtual representation is performed by a method of the invention.

The numerical representation of an object, thus, enables a virtual representation of the object to be re-constructed therefrom, for example, as a point cloud, a triangulated mesh, a rendered object, a poly line object etc. It is an aspect of the invention that the numerical representation is a list of co-ordinates *per se*. It is another aspect of the invention that the numerical representation is a list of co-ordinates after a transformation has been applied thereto. The transformation may be symmetrical (*i.e.* the numerical information may be fully restored by applying a second transformation) or asymmetrical (*i.e.* the numerical information may be restored almost completely by applying a second transformation; the degree to which the restored numerical information deviates from the original may optionally be determined by the user).

30

Another aspect of the invention is a method for evaluating a physical object using a numerical representation of the object. The method includes the steps of: (a) obtaining a numerical representation of the object; (b) comparing the numerical representation of the object with a reference numerical representation of the object; and (c) determining a degree of similarity between the numerical representation of the object and the reference numerical representation of the object.

object and obtaining a set of macro instructions therefrom. The macro so created may be used in a method of the invention and/or may be used with measurement equipment capable of performing measurements of a physical object. It is another aspect of the invention that additional instructions may be added to an existing macro, said instructions created using a numerical representation of the physical object.

It is an aspect of the invention that the method does not perform every instruction of the measurement equipment macro as such; it performs those commands of the macro required for obtaining measurement data from a point cloud. For example, the method may not perform instructions of the macro to move a part of the measurement equipment (e.g. move a robot arm), accelerate or decelerate movements, set the sensitivity, illumination, safety parameters of the probe, provide commands to the operator (e.g. move the part) etc.

While measurement equipment would not be permitted to collide with the physical object, it is an aspect of the invention that translations through the virtual representation of the physical object are performed. Permitting translations through the virtual representation greatly speeds-up the measuring process since a direct path through the object may be taken, instead of around the object.

Where a measurement at a position on the virtual representation is requested by the macro, it is an aspect of the invention that the method renders the virtual representation more accurately at the requested position than elsewhere on the virtual representation. Since there is no necessity to render accurate measurements at any position other than that requested by the macro, the speed of measurement is enhanced. Methods to enhance or render more accurately a virtual representation are known in the art and described above; they include creating triangles or meshes between adjacent points of the point cloud.

An aspect of the invention is a device that is capable of performing a method of the invention.

An aspect of the invention is a computer program held on a computer readable medium that is capable of performing a method of the invention.

Another aspect of the invention is a computer program held on a computer readable medium that is capable of performing a method of the invention.

Another aspect of the invention is a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send a numerical representation of the physical
5 object over the Internet to a method of the invention.

Another aspect of the invention is a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send a measurement equipment macro over the
10 Internet to a method of the invention.

Another aspect of the invention is a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send the title of a measurement equipment
15 macro or an indication thereof over the Internet to a method of the invention.

Another aspect of the invention is a computer program as described above further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to receive an evaluation report of a physical object
20 generated by a method of the invention.

Another aspect of the invention is a computer program as described above further comprising the ability to display a pay-per-use interface on a web browser of a remote computer connected to the Internet. Said pay-per-use interface may indicate a billing amount to the
25 remote computer user, relating to the number of evaluations performed. Said pay-per-use interface may request billing information of the remote computer user. Said pay-per-use interface may request and/or provide a username and password to the remote computer user, to enable a user to access an account for using a method of the invention.

30 It is an aspect of the invention that it is not limited to just to the evaluation of one physical object using one macro and one numerical representation of the object. The method may be used to evaluate multiple objects using multiple macros and multiple numerical representations of the objects. The method may be used to evaluate multiple objects using multiple macros and multiple numerical representations of the objects.

have sufficient knowledge and learning to scale up the method and device of the present invention.

5 The invention allows the continuation of the use of equipment macros already present in the user's library, and frees the measurement equipment that measures the physical object for other uses.

The evaluation of the physical object using a machine macro and measurement equipment would normally require a specialized engineer.

10 A physical object may be scanned by a non-specialised technician since scanning is a routine and fast operation.

The time that would normally be spent by the specialized engineer in obtaining measurements from the physical object and in operating the measurement equipment may
15 now be spent operating the method and device of the invention.

Since the invention does not require the measurement equipment, said equipment may be put to use to routinely scan several physical objects in the same time that it would take a specialized engineer to evaluate a single object.

20

The evaluation may be performed by a client, thus providing time and cost saving when the measurement equipment is associated with a remotely located manufacturer.

25 Through this invention these macro's can also be used in combination with point clouds generated by new non-contact measurement equipment. The large databases of measurement macro's generated on many industrial parts can still be used for quality control evaluation.

DETAILED DESCRIPTION OF THE FIGURES

- Figure 1 depicts an embodiment of the invention showing a method of the invention 1, which reads and performs the instructions of a measurement equipment macro 2, and by applying it to a numerical representation of the object ("Virtual object") 3. Obtained from the method is evaluation data 7. Thus, the macro 2 and the virtual object 3 are input 4, 5, and the evaluation data 7, is output 7 of a method of the invention 1.
- Figure 2 is another embodiment of the invention depicting a situation where an evaluation report is required of an object that was scanned in a remote location. In this depiction, a manufacturer 23 has produced a physical object 21 and has scanned the object using a CMM 22. The numerical representation of the data ("Virtual object") 3, obtained therefrom is transferred 25 using a computer 24 connected to an intermediary computer 26 on which a computer program capable of performing a method of the invention is stored 1. The connection 25 may be across the Internet, across a local area network, across a telephone line, an ISDN connection or via any means of transferring data between two computers. One or more macros, or indications of the titles of one or more macros may optionally be communicated via the manufacturer's computer 24 to the intermediary computer 26. The intermediary computer 26 may be a web server, or any computer capable of communicating with remote computers. The intermediary computer 26 may embody a collection of interconnected separate physical computers which together perform the task of the intermediary computer 26. The intermediary computer executes the macro 2, if a macro 2 was provided by the manufacturer 23 upon the virtual object 3, and the evaluation data is held on the intermediary computer 26 for transmitting 27 to the computer of the client 28 from where it is made available to the client as a report or data 7. If no macro 2 was provided by the manufacturer 23, or if the client 2 wishes to use the method 1 with another macro 2, the client 29 may transmit 201 a macro 2 to the intermediary computer 26. The intermediary computer executes the method 1, using a macro 2 provided by the client 29 upon the virtual object 3. Again the evaluation data so produced is held on the intermediary computer 26 for transmitting 27 to the computer of the client 28 from where it is made available to the client as a report or data 7. In an option of the invention and the numerical representation of the

performing a method by an intermediary computer, an anti-piracy protection of the method by the owner of the intermediary computer is provided, and the possibility of pay-per-use.

Figure 3 is another embodiment of the invention depicting a situation where an evaluation report is required of an object that was scanned in a remote location. In this depiction, a manufacturer 23 has produced a physical object 21 and has scanned the object using a CMM 22. The numerical representation of the data ("Virtual object") 3, obtained therefrom is transferred 25 using a computer 24, to the computer of the client 28. The communication path 31 along which the virtual object 3 is transmitted may be via any means of transferring data between two computers including across the Internet, email, across a local area network, across a telephone line, an ISDN connection, radio link, cables or via physically removable storage media. One or more macros, or indications of the titles of one or more macros may optionally be communicated via the manufacturer's computer 24 to the client's computer 28. A computer program capable of performing a method of the invention 1 is held on the client's computer 28. The method 1 reads and performs the instructions of the macro 2, if a macro 2 was provided by the manufacturer 23 upon the virtual object 3, and the evaluation data 7 is provided by the method. If no macro 2 was provided by the manufacturer 23, or if the client 2 wishes to use the method 1 with another macro 2, the client may perform the method 1 using a macro a held on the client's computer 28. Again the evaluation data so produced is made available to the client as a report or data 7. By remotely evaluating an object from a numerical representation of an object provided by the manufacturer allows faults, defects and other evaluation information to be detected by the client without the physical presence of the object. The object may thus remain in the factory until such a time as the evaluation has been carried out. Furthermore, there is no need for the client to possess expensive scanning equipment.

CLAIMS

1. A method for evaluating a physical object comprising the steps of:
 - 5 - reading the instructions of a macro,
 - said macro suitable for use with measurement equipment capable of performing measurements of a physical object,
 - said macro comprising instructions for said equipment to perform an evaluation of a physical object,
 - 10 - performing the instructions of said macro upon a numerical representation of the surface of said object, and
 - obtaining from the results of the macro, an evaluation of the physical object.
2. Method according to claim 1 wherein said numerical representation of the surface is
15 obtained by scanning part or all of the physical object using an object scanner.
3. Method according to claims 1 and 2 wherein said numerical representation of the surface is any of point cloud data, triangulated mesh data, rendered surface data, or
20 polyline data.
4. Method according to any of claims 1 to 3 wherein said measurement equipment is a Coordinate Measuring Machine, CMM.
5. Method according to any of claims 1 to 4 wherein said macro comprises Dimensional
25 Measuring Interface Standard, DMIS, commands.
6. Method according to any of claims 1 to 5 wherein said macro comprises CMM commands.
7. Method according to any of claims 1 to 6 whereby said evaluation is communicated by
30 part of a DMIS-measurement program or by using DMIS commands format.
8. Method according to any of claims 1 to 7 whereby the said evaluation is communicated in the format of CMM measurement results.

9. Method according to any of claims 1 to 8 wherein the instructions of said macro that are performed relate to the measurement of data from the numerical representation of the surface.

5

10. Method according to any of claims 1 to 9 wherein translations through the surface of the object may be performed by the method.

10

11. Method according to any of claims 1 to 10 wherein a measurement comprises the steps of:

15

- (a) determining those elements of data numerically representing the object, that correspond to the position on the physical object to be measured, without increasing the resolution by calculating the co-ordinates of any additional points,
- (b) calculating by interpolation of the elements determined in step (a) additional points in the area of the position to be measured, so increasing the resolution therein,
- (c) calculating from the higher-resolution area determined in step (b) a measurement of the object.

20

12. Method according to any of claims 1 to 11 wherein one or more instructions of said macro have been created by using said numerical representation of the physical object.

25

13. Method according to claim 12 wherein said instructions are recorded to the macro by way of a DMIS-measurement program or using the DMIS commands format.

30

14. Method according to claims 12 and 13 wherein said instructions are part of a measurement sequence generated by recording commands of a Coordinate Measuring Machine measurement program.

15. Method according to any of claims 12 to 14 in which the said instructions are part of a measurement sequence generated by recording commands of a Coordinate Measuring Machine measurement program.

16. Method according to any of claims 1 to 15 wherein said evaluation comprises the execution of steps on a computer in an automatic way without interaction with the user of said computer during the execution of the said steps:
- 5 17. Method for virtually measuring an object using a cloud of points virtually representing the said object and calculating the value or values that approximates the value or values that would result from the measurement of the said object by a measuring device.
- 10 18. Method for virtually probing an object using a cloud of points virtually representing the said object and calculating or selecting the point that approximates the point that would result from the probing of a CMM on the said object.
- 15 19. A computer program stored on a computer readable medium capable of performing the method according to any of claims 1 to 18.
- 20 20. A computer program according to claim 19 further comprising the ability to receive a numerical representation of the physical object from a remote computer.
- 20 21. A computer program according to claim 20 wherein the numerical representation is received from the remote computer across any of the Internet, email, wireless link, public switched telephone network, ISDN, satellite link, or by physical transport of a computer readable storage medium holding said numerical representation.
- 25 22. A computer program according to claim 21 wherein said computer readable storage medium is any of optical disk, magnetic disk, optic-magnetic disk, magnetic tape.
- 30 23. A computer program according to any of claims 19 to 22, further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send a numerical representation of the physical object over the Internet to said method.
24. A computer program according to any of claims 19 to 23 further comprising the ability to display a user interface on a web browser of a remote computer connected to the

Internet, said interface allowing a user to send said macro over the Internet to said method.

5 25. A computer program according to any of claims 19 to 24 further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to send the title of said macro or an indication thereof over the Internet to said method.

10 26. A computer program according to any of claims 19 to 25 further comprising the ability to display a user interface on a web browser of a remote computer connected to the Internet, said interface allowing a user to receive an evaluation report of a physical object generated by said method.

15 27. A computer program according to any of claims 19 to 26 further comprising the ability to display a pay-per-use interface on a web browser of a remote computer connected to the Internet, said pay-per-use interface capable of one or more of the following:
(a) requesting and/or providing a username and password to the remote computer user, to enable a user to access an account for using the method,
(b) requesting billing information of the remote computer user,
20 (c) indicating a billing amount to the remote computer user, relating to the number of evaluations performed.

28. A device capable of performing a method of any of claims 1 to 18.

25 29. A piece of measurement equipment capable of performing measurements of a physical object, capable of performing a method of any of claims 1 to 18.

30 30. A piece of measurement equipment according to claim 29, wherein said equipment is a CMM.

ABSTRACT

A method, device and computer program for evaluating an object using a virtual representation of said object

5

The present invention relates to a method for evaluating an object by reading and commands of a macro normally used in measurement equipment for evaluating a physical object, and applying said commands to a numerical (virtual) representation of a physical object. Said method provides a evaluation of the physical object, by applying said macro to a virtual

10

representation of said object.

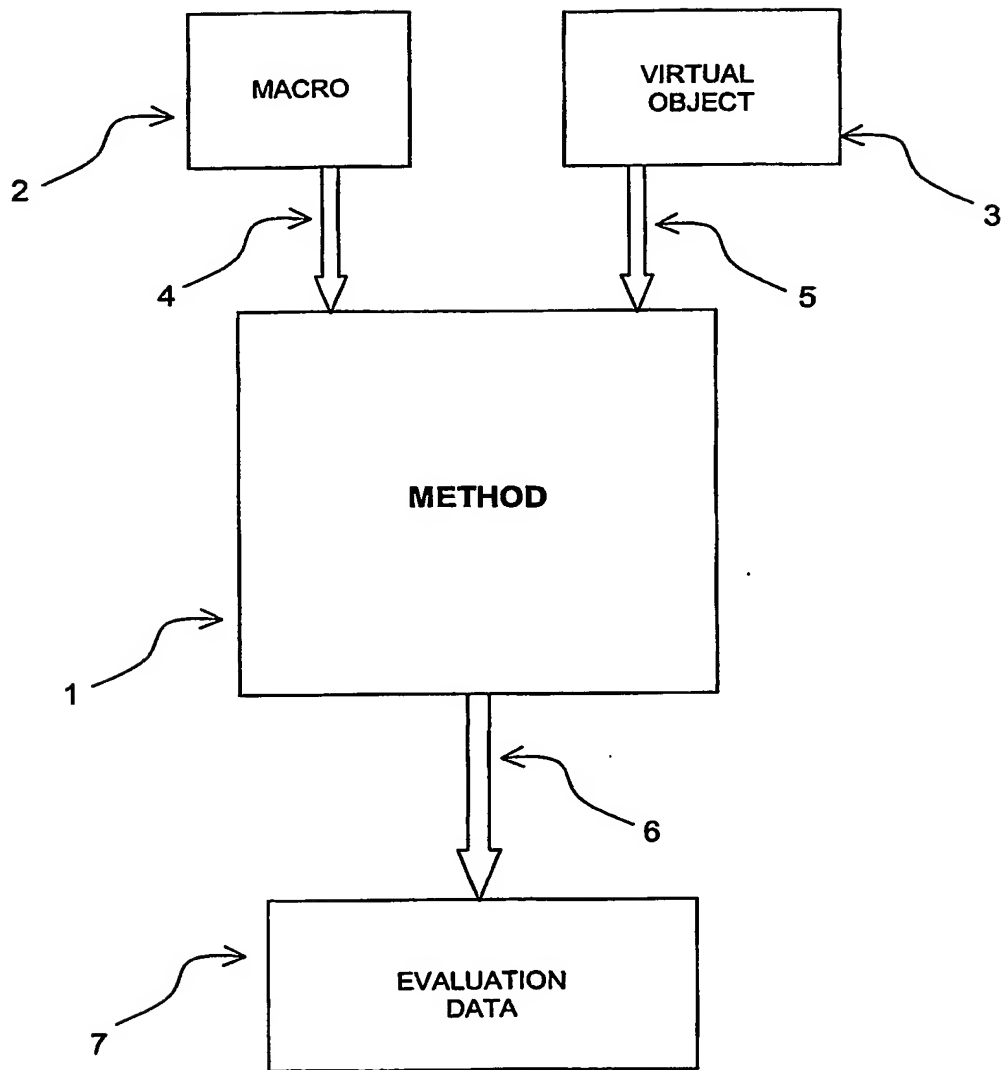


FIGURE 1

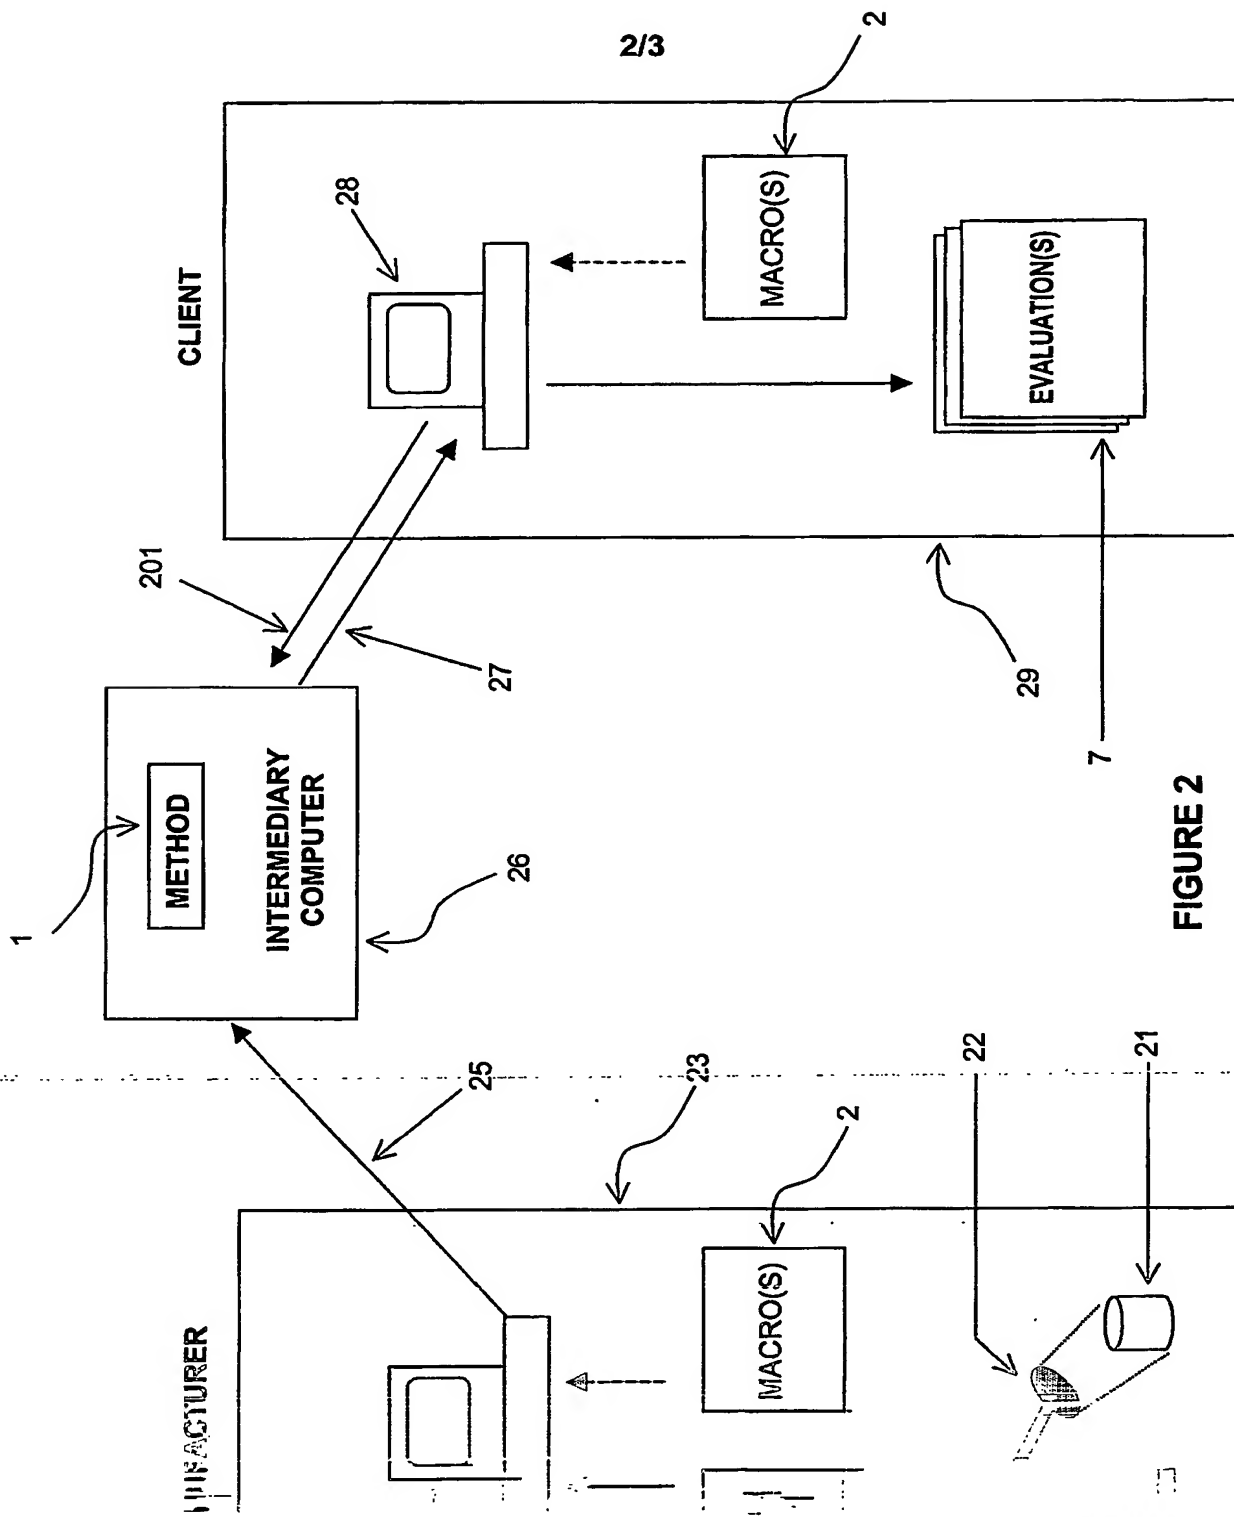


FIGURE 2

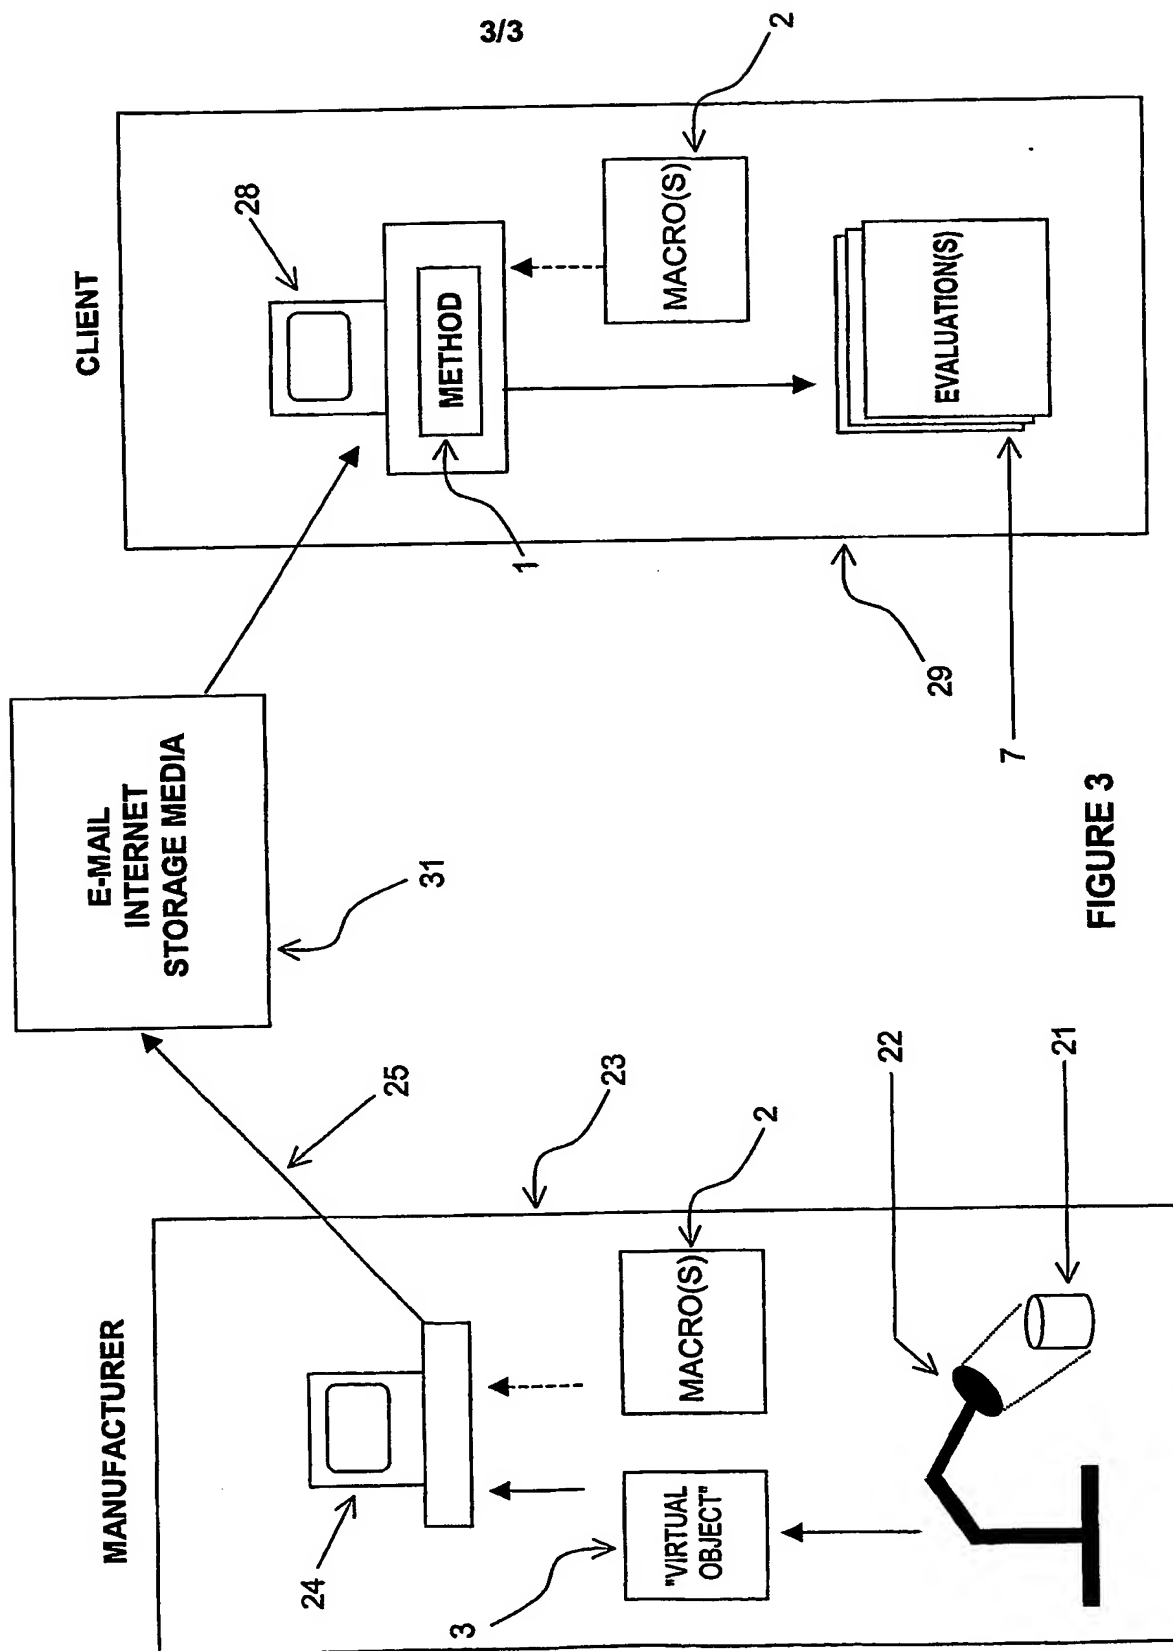


FIGURE 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.